


PowerMir

High Power Pulsed QCL 4,6 microns HHL



PowerMir product line is high power pulsed Quantum Cascade Laser based on proprietary technology, emitting in Mid-Infrared. It provides maximum average power of minimum of 1 Watt at 4,6 microns (spec code: PW4601000HNA). The High Heat Load (HHL) package includes the high power laser mounted in a thermoelectric cooler and suitable optics to collimate the output of the laser.

ITAR free MirSense technology exhibits outstanding performances in term of power and wall plug efficiency. This high-performance QCL assembly takes full advantage of MirSense's state of the art technologies.



Optical features


Maximum Average Optical Power	Minimum of 1W at +20°C of base plate temperature
Mode of operation	Quasi-CW, high duty cycled pulsed
Central wavelength	4,6 μm +/- 0.1 μm
Pulse frequency	> 500 kHz
Divergence	Horizontal < 8 mrad (typically 6mrad) Vertical < 6 mrad (typically 4mrad)
Beam quality	TM00 Gaussian beam, $M^2 < 1.5$
Output beam dimension (typ.)	2 mm x 3 mm
Polarization	Linear vertically polarized

Mechanical and electrical features


Packaging	Hermitically sealed with nitrogen gas fill inside a High-Heat Load (HHL) package.
Wall-plug efficiency	5 to 10%
Built-in TEC included	$I_{\text{max}} = 5.2\text{A}$, $V_{\text{max}} = 15.7\text{V}$
Laser current (typ.)	2 A (1 A average at 50% dutycycle)
Laser voltage	10 to 20 V
Operational temperature	-20°C to +30°C @ base plate. This working environmental temperature must in any case be above dew point to avoid water condensation
Reliability	> 3500 hrs
Weight	70 grams

Drawings


All dimensions are in mm

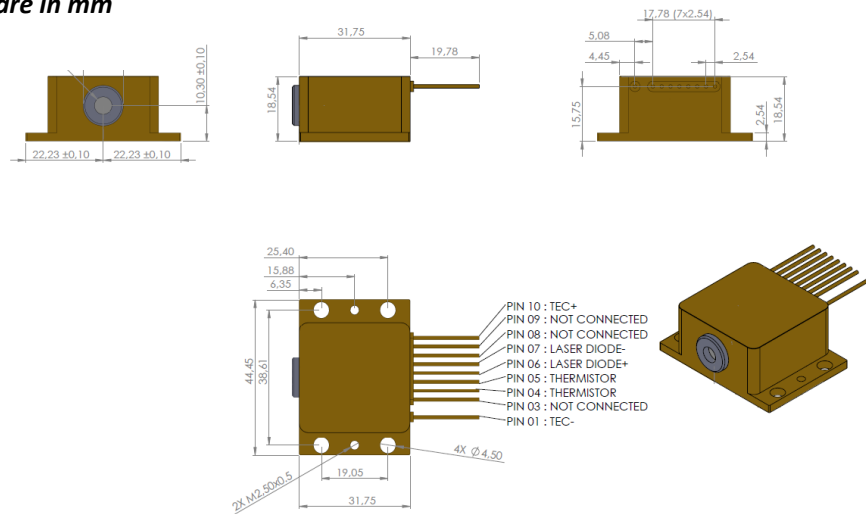


Characteristics

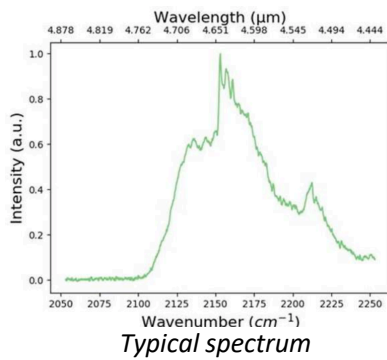

Typical spectrum

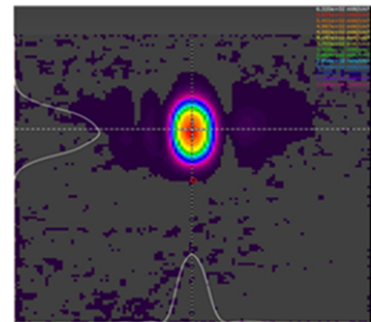

Beam quality

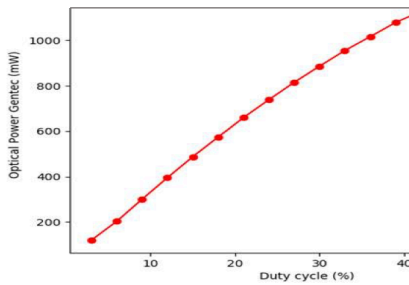

Average optical power of the laser as a function of the laser duty cycle with a pulswidth of 900ns and a laser temperature of +20°C

Options

- Driver for laser modulation
- Customized packaging upon request